



Model 508i / 502i

Access Control Panel

The Model 508i/502i Access Control Panel is the most flexible, dependable integrated access control solution available. Each Panel provides Native IP for network connections.

Operated with Galaxy Control Systems' state-of-the-art System Galaxy software, the Model 508i/502i can support everything from access control, alarms & CCTV, to badging & video verification, to elevator control & facility management.

Modular design allows for easy expansion. Allowing control of up to eight doors per 508i panel (up to two on the Model 502i), multiple 508i and/or 502i panels can be linked together to create a custom system that is as large (or small) as needed.



Model 508i - Eight Door Version

Benefits

INTEGRATION OF:

- ACCESS CONTROL
- ALARM MONITORING
- CCTV/DVR
- BIOMETRIC
- VIDEO IMAGING & BADGING
- VIDEO VERIFICATION
- FACILITIES MANAGEMENT
- ELEVATOR CONTROL



Model 502i - Two Door Version

Expandable Modular Design

Native IP for Network Connections

Dependable, Built - in Surge Protection

Supervised Communication & Alarm Inputs

Real - time, On - site, or Remote Operation

Supports All Reader Technologies

Monitor Alarms, Motion Detectors, and Other Sensing Equipment

Protects Personnel, Visitors, Buildings, Equipment, and Other Assets

Supports All Standard Reader Technology, Including SMART Cards and Biometrics

REXX[1. 8]



Galaxy Control Systems



Model 508i / 502i

FEATURES

508i - to 8 Doors Per Controller


502i - to 2 Doors Per Controller

- ▶ Supports all card technologies
- ▶ Supports biometrics
- ▶ Supports SMART cards
- ▶ 64,000 card/user capacity
- ▶ 10,000 event buffer control unit
- ▶ 256 access groups/levels
- ▶ 256 time schedules
- ▶ 256 alarm partitions
- ▶ 1-8 doors/ports per controller (Model 508)
- ▶ 1-2 doors/ports per controller (Model 502)
- ▶ Distributed network
- ▶ 255 controllers per loop
- ▶ 64 floor elevator control
- ▶ Programmable duress
- ▶ Scheduled lock/unlock
- ▶ Programmable temporary cards
- ▶ Unlimited holidays/special days
- ▶ Two-man access rule


SPECIFICATIONS

- ▶ Input Power
12 VDC at 2 amps
- ▶ Relay Outputs
Form-C contacts 24 VAC, 1.5 amps max
- ▶ Temperature Range
-10°C to +60°C, non-condensing
- ▶ Communications
TCP/IP, RS-232 Direct Connect, or Dial-up modem
- ▶ Connections
Straight lead barrier strips and standard DB type connectors
- ▶ Enclosure
Hinged electrical cabinet with lock (21" x 14" x 6")

Model 502i - Two Door Version

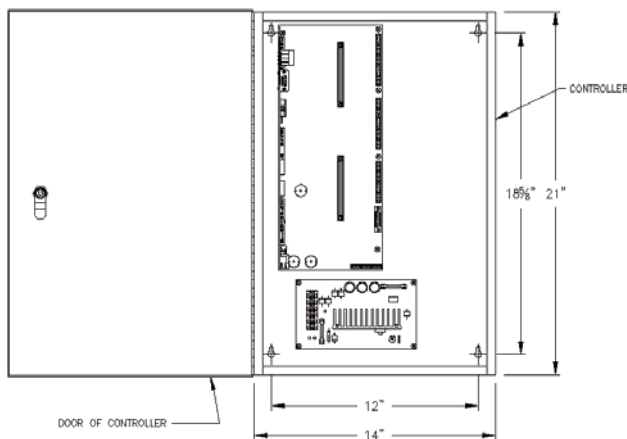

Model 508i - Eight Door Version

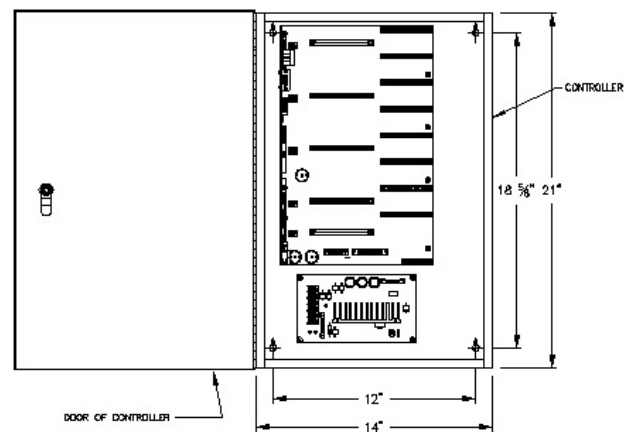

**Galaxy
Control Systems**

3 North Main Street, P.O. Box 158, Walkersville, MD 21793-0158 USA

Phone (301) 845.6600 / FAX (301) 898.3331 / Email: info@galaxysys.com

www.galaxysys.com